


# POLO

## FEET WITH CASTORS

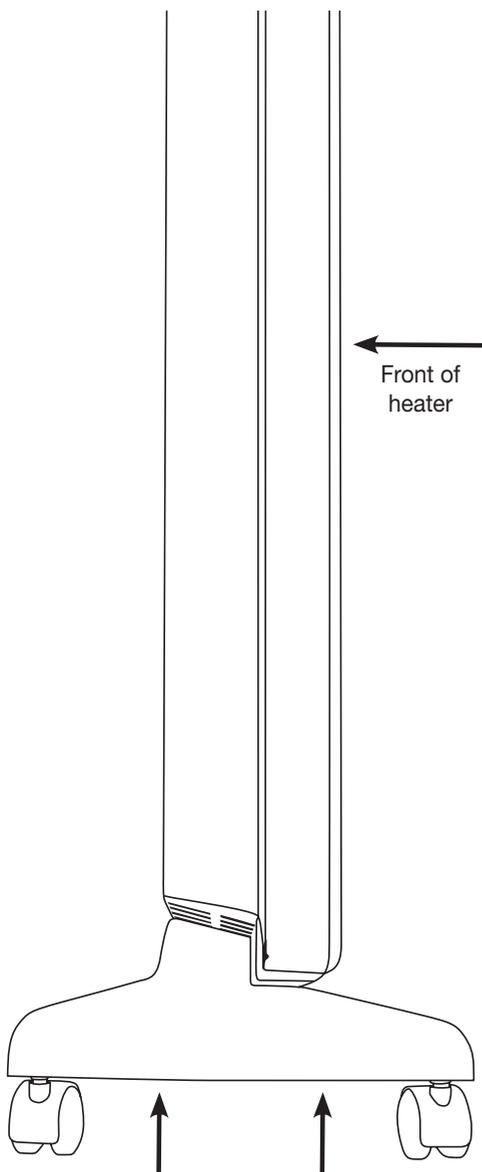

2 self tapping screws (with washers)  
installed through base of each foot

### CONTENTS

- Two plastic POLO feet with castors.
- Five Philips head self tapping screws with 5 spring washers (including one spare of each).

### INSTALLATION INSTRUCTIONS

- (1) Remove the wall bracket from the back of the heater by pressing down on the two tabs on the top of the bracket and pulling it away from the heater. Lift the two bottom tabs of the wall bracket away from the heater through slots in the back of the heater.
- (2) Turn the heater on its side and locate the two holes in the base of the heater approximately 100mm from each end which are used to secure the feet.
- (3) Install 2 self tappers (with a spring washer on each) through the holes in the base of each foot into the two predrilled holes in the underside of the heater using a Philips head screw driver. These holes are situated approximately 100 mm in from each end of the heater. Tighten these screws securely. See diagram.
- (4) Repeat to install the second foot.